

DRIFT THICKNESS OF WYOMING COUNTY, NEW YORK

Sean P. Grasing, Avery Blake, Julia Rogerson and Karl J. Backhaus

2024

Introduction

Beginning in 2019, under the guidance and funding provided by the United States Geological Survey - Great Lakes Geological Mapping Coalition (award G20AC00401), the New York State Museum - Geological Survey began a state wide effort to conduct geologic mapping of bedrock elevations throughout New York. Wyoming County, of Western New York, extends from the Central Lowland to the Appalachian Plateau physiographic provinces. The county is nestled between Erie, and Livingston counties. Wyoming County is also located along two large bodies of water, Lake Ontario and Oneida Lake. Surficial and subsurface bedrock point data and maps were compiled from publicly available sources, vetted, and organized into a comprehensive geospatial database. A technical workflow was developed to categorize the overall geology and differentiate between the underlying bedrock and overlying unconsolidated sediments. The resulting bedrock elevation map provides a detailed representation of bedrock topography across Wyoming County. This map is useful for various applications, including geological studies, engineering and construction, natural resource management (such as water or mineral resources), and environmental studies.







Methodology

A total of 5,401 bedrock control points were used to delineate bedrock topography in Wyoming County. These points consisted of 4,407 bedrock outcrops, 2,412 water wells, 10 engineering boreholes, 40 waterfall locations and 13 oil and gas wells. These data were compiled from a variety of public sources and imported into ESRI's ArcMap 10.8 software platform. Ground surface elevations for all control points were extracted from a compilation of three separate digital elevation models (DEM) which were resampled to match a 1-meter LIDAR DEM cell size. Bedrock elevations were calculated at each location by subtracting the depth-to-bedrock from the ground surface elevation. 50-foot bedrock elevation contours were auto-generated and manually refined through a multi-step quality control process to resolve any interpolation errors. The finalized contours were converted into a 1-meter raster, using the "Topo to Raster" tool, that represents county-wide bedrock topography. Lastly, the "Raster Calculator" tool is used to subtract the surface elevation from the bedrock elevation to determine the thickness of the drift in the county.

Summary



The New York State Museum – Geological Survey has developed a detailed Drift Thickness Map for Wyoming County. This map represents a compilation of various surficial and subsurface bedrock data sources, analytical meth-

Explanation


- Data Point
-  50ft Drift Thickness Contour
-  100ft Drift Thickness Contour
-  Highway
-  Wyoming County Line
-  Adjacent County
-  Water Body

Drift Thickness

Feet Thick

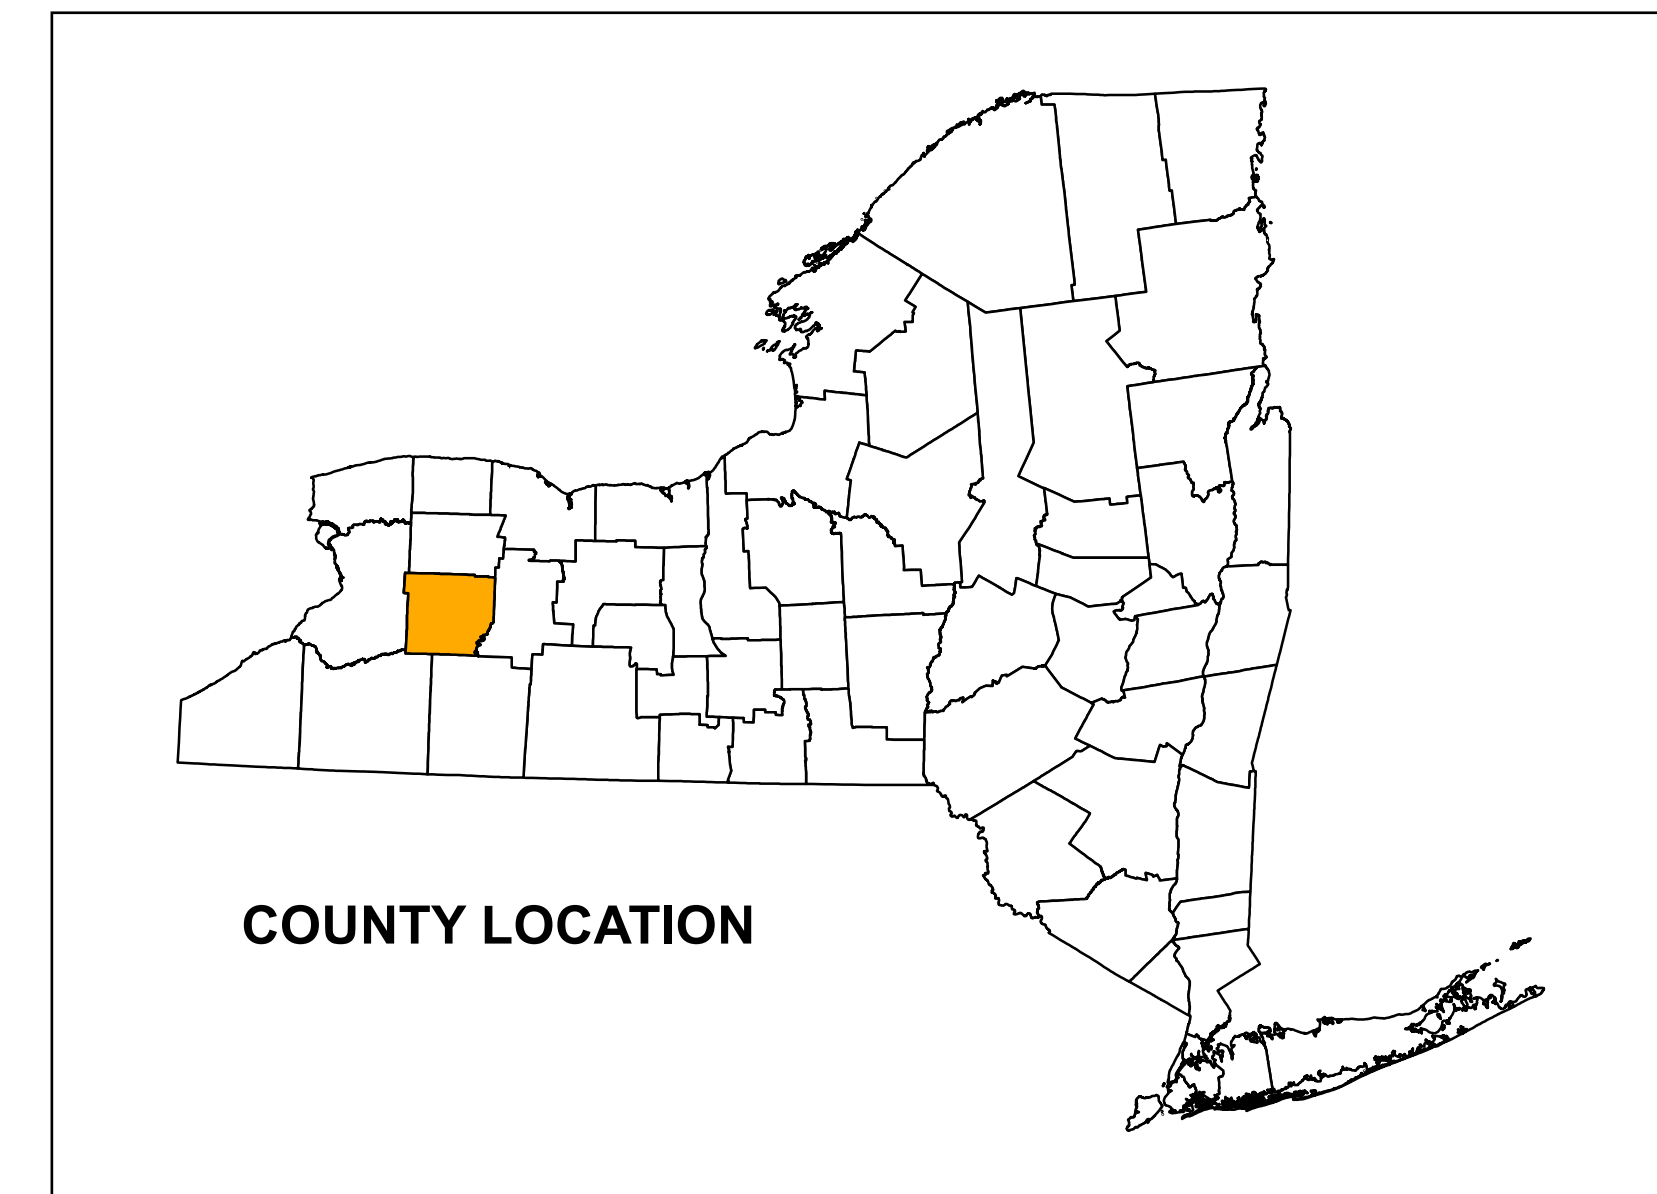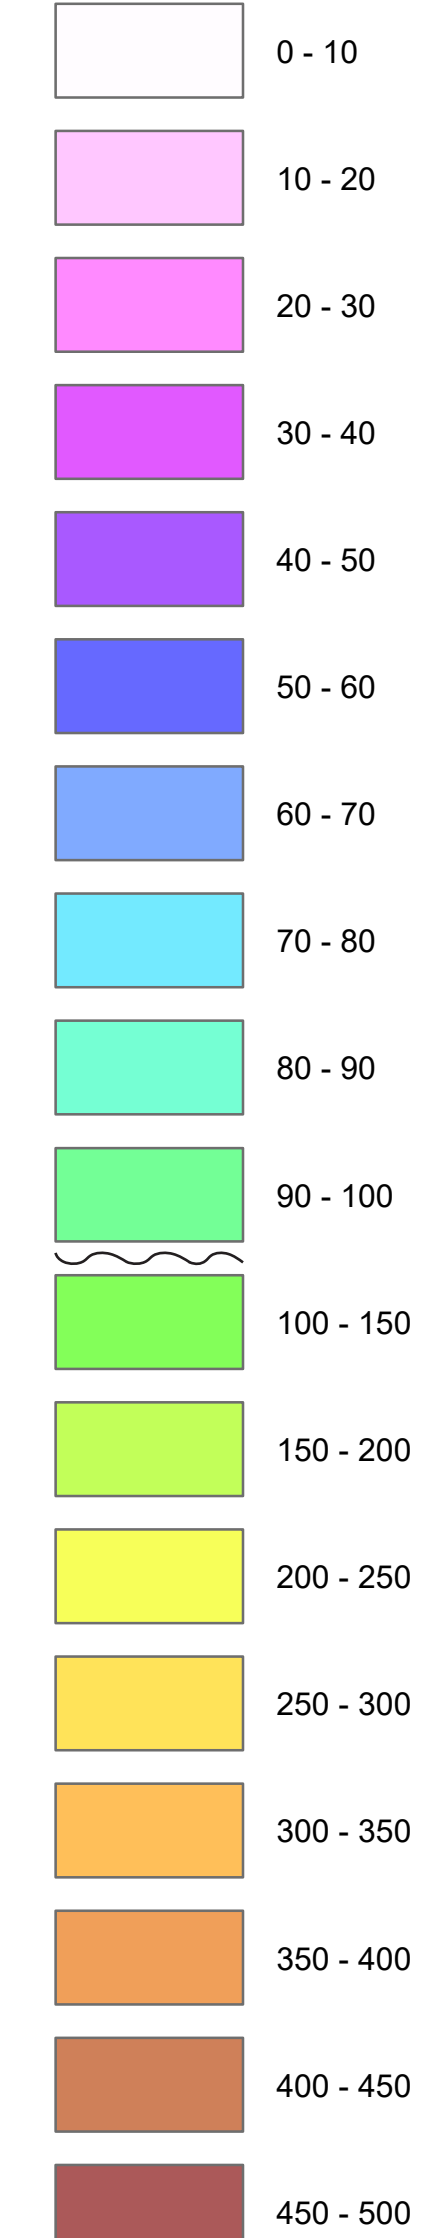

DRIFT THICKNESS CONTOUR MAP

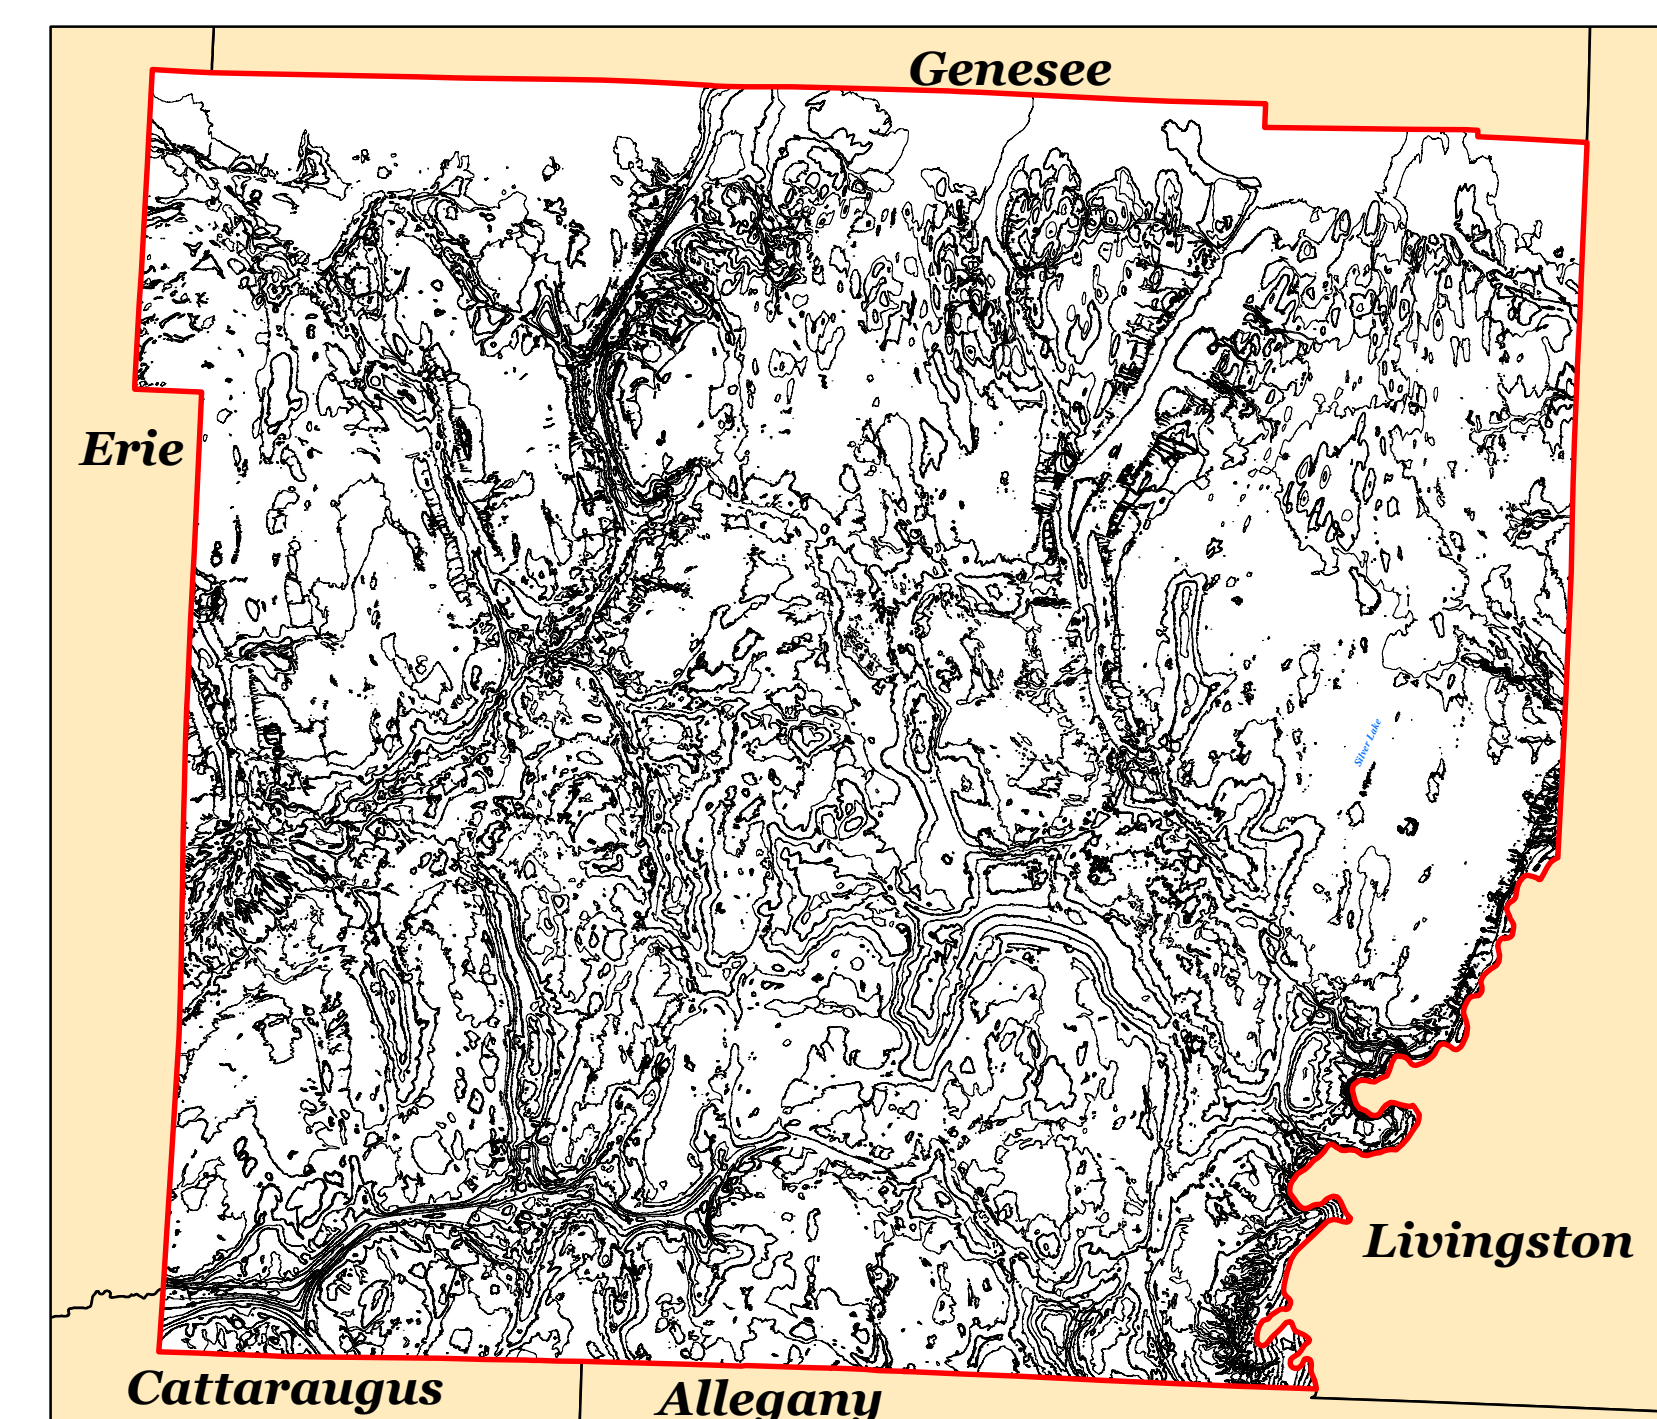

New York State Museum Map & Chart No. 196
ISSN:0097-3793 ; ISBN:978-1-55557-450-5

