

# DRIFT THICKNESS OF TIOGA COUNTY, NEW YORK

Karl J. Backhaus, Hailey M. Forgeng and Julia E. Rogerson

2024

# Introduction

Beginning in 2019, under the guidance and funding provided by the United States Geological Survey - Great Lakes Geological Mapping Coalition (award G20AC00418), the New York State Museum - Geological Survey began a statewide effort to conduct geologic mapping of bedrock elevations throughout New York. Tioga County, of Southern Tier region of New York, lies entirely in the Appalachian Plateau physiographic province. The county is bounded by Broome, Chemung, Cortland, Schuyler and Tompkins Counties in New York and Bradford and Susquehanna Counties in Pennsylvania. Surficial and subsurface bedrock point data and maps were compiled from publicly available sources, vetted, and organized into a comprehensive geospatial database. A technical workflow was developed to categorize the overall geology and differentiate between the underlying bedrock and overlying unconsolidated sediments. The resulting bedrock elevation map provides a detailed representation of drift thickness across Tioga County. This map is useful for various applications, including geological studies, engineering and construction, natural resource management (such as water or mineral resources), and environmental studies.

# Methodology

A total of 1,814 bedrock control points were used to delineate bedrock topography in Tioga County. These points consisted of 1,738 water wells, 42 field sampling locations, 29 engineering boreholes, and five waterfall locations. These data were compiled from a variety of public sources and imported into ESRI's ArcMap 10.8 & ArcGIS Pro 3.2.2 software platform. Ground surface elevations for all control points were extracted from a compilation of three separate digital elevation models (DEM) which were resampled to match a 1-meter LIDAR DEM cell size. Bedrock elevations were calculated at each location by subtracting the depth-to-bedrock from the ground surface elevation. 50-foot bedrock elevation contours were auto-generated and manually refined through a multi-step quality control process to resolve any interpolation errors. The finalized contours were converted into a 1-meter raster, using the "Topo to Raster" tool, that represents county-wide bedrock topography. Lastly, the "Raster Calculator" tool is used to subtract the surface elevation from the bedrock elevation to determine the thickness of the drift in the county.

## Summary

The New York State Museum – Geological Survey has developed a detailed Drift Thickness Map for Tioga County. This map represents a compilation of various surficial and subsurface bedrock data sources, analytical methods, and quality control procedures. The resulting bedrock elevations

# Explanation

- Data Point
-  50ft Drift Thickness Contour
-  100ft Drift Thickness Contour
-  Highway
-  Tioga County Line
-  Adjacent County

42.188° N

## Drift Thickness

**Feet Thick**

0 - 10

10 - 20

20 - 30

30 - 40

40 - 50

50 - 60

60 - 70

70 - 80

80 - 90

90 - 100

100 - 150

150 - 200

200 - 250

250 - 300

300 - 350

350 - 400

400 - 450

450 - 500


500 - 550

550 - 600

600 - 650

650 - 700

700 - 750

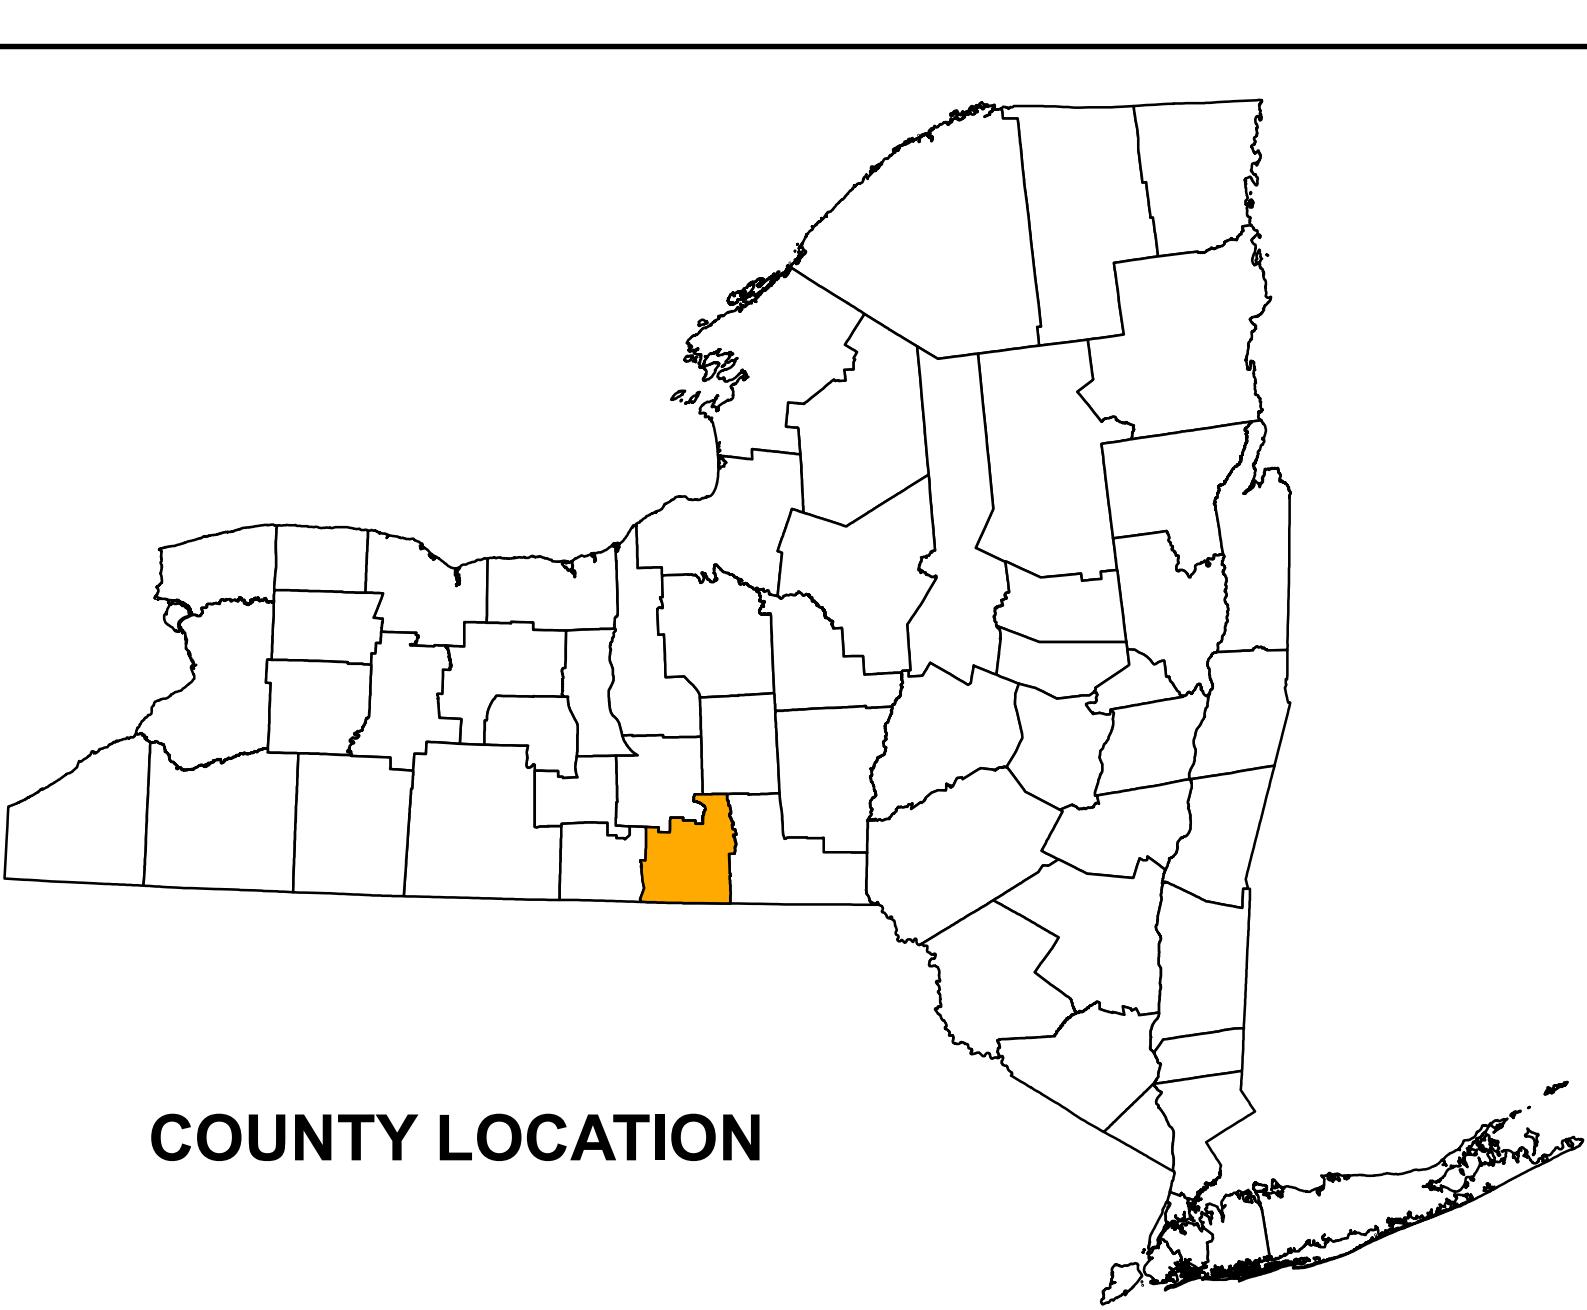

# DRIFT THICKNESS CONTOUR MAP

